



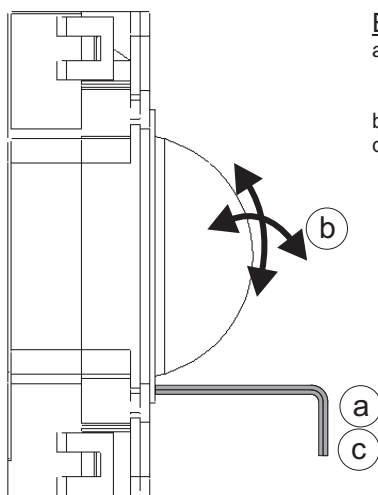

Einstellen der Kamera:

- Lösen der Feststellschraube mit dem beigegeführten Schlüssel bis die Kamera sich leicht einstellen lässt.
- Ausrichten der Kamera.
- Sichern der Kamera-Einstellung durch Anziehen der Feststellschraube

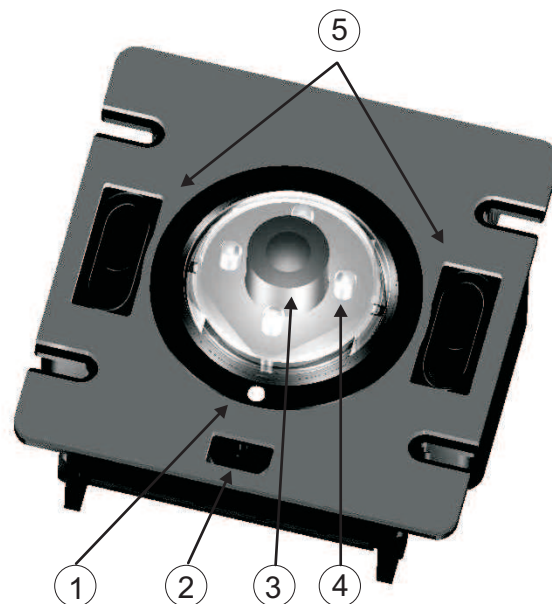


Beschreibung:

- Feststellschraube**
- Mikrofon**
- Kamera**
- Infrarotbeleuchtung**
- Lautsprecher**
- Anschlußklemmen**


Klemme a/b: i2-BUS
 Klemme T/T: potentialfreier Türöffner Schaltkontakt (max.24V/1A)
 Klemme L: Lichttasteranschluß (Gegenpol Klemme a oder b)

- Drehcodierschalter** (rot)
 Stellung 0-9: Adressen für Türlautsprecher im Hauptstrang
 Stellung A-F: Adressen für Türlautsprecher im Nebenstrang (Laubengang)
- Jumper** (gesteckt: Türöffner nur bei Verbindung, gezogen: Türöffner jederzeit)
- Status-LED** (Signalisiert: Abgehender Ruf und Verbindungszustand)
- Jumper** (gesteckt: Quittierungstöne aus, gezogen: Quittierungstöne an)
- Anschluss für i2-BUS Tastenexpander** (BTE-116)
- Lautstärkeregler**
- Anschlußklemmen**

Klemme V/W: Videosignalausgang
 Klemme +/-: Spannungsversorgung (DC 15V)

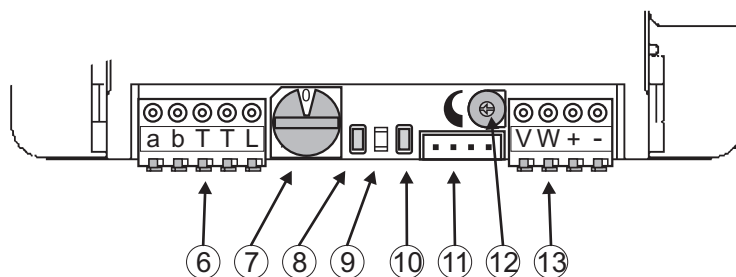

Anschlussklemmblock abziehbar



Leiter anschließen:

Leiter einfach einstecken.
 (Massivleiter Ø 0,4-0,8mm)

Leiter lösen:

Orangenen Drücker betätigen.
 Leiter herausziehen.

Einbauhinweise:

Die Kamera darf nicht ausgerichtet werden auf:


- Leuchten oder andere Lichtquellen
- direkte Sonneneinstrahlung
- Bildhintergrund mit großer Helligkeit oder starken Kontrasten
- stark reflektierende Wände


Empfohlene Einbauhöhe ca. 1,60m

Technische Daten:


System: i2-BUS Video 6Draht-Bussystem
 Videosignal: symmetrisch 1Vp-p Z=100Ohm
 Auflösung: 320.000 Pixel
 Lichtempfindlichkeit: 0,1Lux / F2.0
 Öffnungswinkel: 60° Vertikal 80° Horizontal
 Verstellbereich: +/- 47° horizontal / vertikal

Aufnahmebereich:

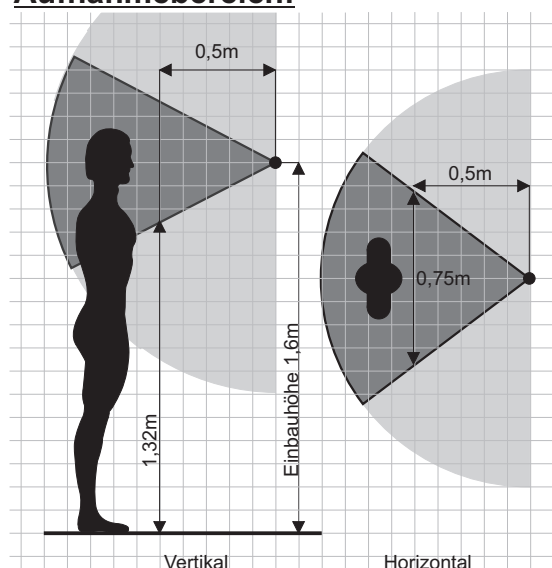

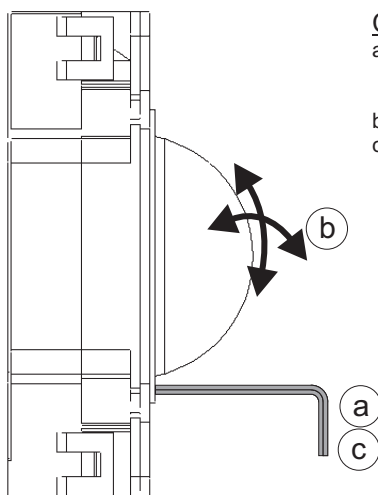**Camera adjustment:**

- Loosen the fastening screw with the enclosed key until the camera can be moved easily.
- Align the camera.
- Secure the camera setting by tightening the fastening screw.

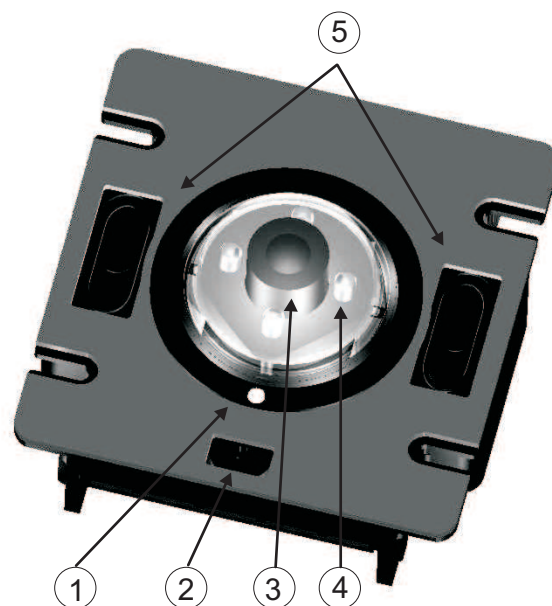**Description:****1. Fastening screw****2. Microphone****3. Camera****4. Infrared light****5. Loudspeaker****6. Connection terminals**

Terminal a/b: i2-BUS

Terminal T/T: Voltage-free door opener switch contact (max. 24 V/1 A)

Terminal L: Light button connection (counter-pole terminal a or b)

7. Rotary code switch (red)



Position 0-9: Addresses for door loudspeakers in the main line

Position A-F: Addresses for door loudspeakers in the subline (arcade)

8. Jumper (shorted: door opener only on connection; open: door opener at any time)**9. Status LED** (indicates: outgoing call and connection status)**10. Jumper** (shorted: acknowledgement tones off; open: acknowledgement tones on)**11. Connection for i2-BUS button expander** (BTE-116)**12. Volume control****13. Connection terminals**

Terminal V/W: Video signal output

Terminal a/-: Power supply (15 VDC)

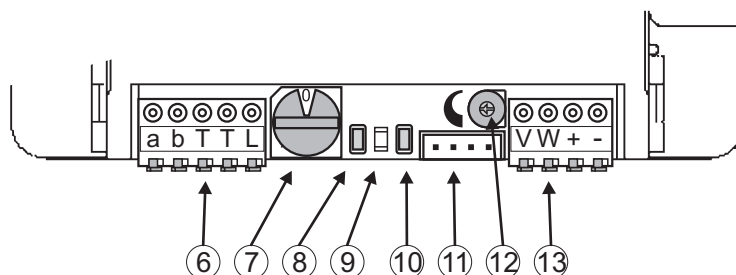**Detachable connection terminal block****Connecting wires:**


Simply plug in the wire.

(Solid conductor Ø 0.4-0.8 mm)

Disconnecting wires:

Press orange clip.

Pull out the wire.

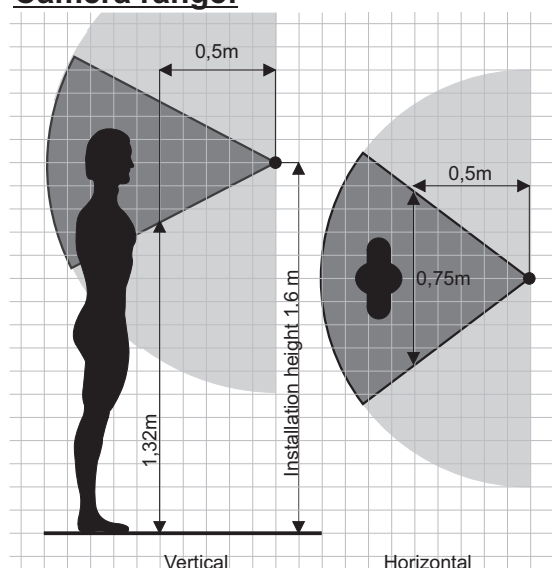Camera range:**Installation instructions:**

The camera must not be aimed at:

- lamps or other sources of light
- direct sunlight
- bright or high-contrast picture backgrounds
- highly reflective walls

Recommended installation height approx. 1.60 m

Technical data:

System:	i2-BUS Video 6Wire-Bussystem
Video signal:	Symmetrical 1 Vp-p Z = 100 Ohm
Resolution:	320,000 pixels
Photosensitivity:	0.1 Lux / F2.0
Aperture angle:	60° vertical 80° horizontal
Adjustment range:	+/- 47° horizontal / vertical