

**ECA381D**

Three phase energy meter,  
direct connection 80 A

with MID declaration of conformity  
and Modbus RTU communication / agardio system  
MID certification concerns active energy only.

User instructions  
EU declaration of conformity:  
<http://hgr.io/r/eca381d>

## Safety instructions

- This device must be installed indoor only by a professional electrician fitter according to local applicable installation standards.
- Do not plug in or unplug this product when the power supplying is ON. Its use is only permitted within the limits shown and stated in the installation instructions. The device and the equipment connected can be destroyed by loads exceeding the values stated.
- Any type of intervention on the products, including cases in which they cease to function or present defects, can be dangerous for the operator's safety and relieves the Manufacturer from all civil and criminal liability.


## Function

This 4 quadrants Modbus RTU meter measures the active and reactive energy used in an electrical installation. Reactive energy is measured but not displayed. This device can manage 2 tariffs by 230 VAC digital input and up to 8 controlled via communication. Only the total active energy register can be used for billing purposes according to measuring instrument directive (MID).


- Active Energy Class B (according to EN 50470-3:2022)
- Active Power Class 1 (according to IEC 62053-21:2020 and IEC 61557-12:2018)
- Reactive Energy Class 2 (according to IEC 62053-21:2020).
- Reactive Power Class 2 (according to IEC 62053-21).

This device has a backlit LCD and 3 push-button keys to read Energies, V, I, PF, F, P, Q and to configure some parameters. The design and manufacture of this meter comply with Standard EN 50470-3:2022 requirements.

**Power factor**  
Convention according to IEC 62053-23:2020

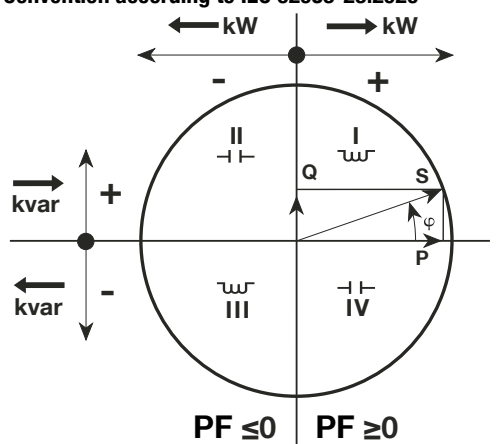


## Presentation of device

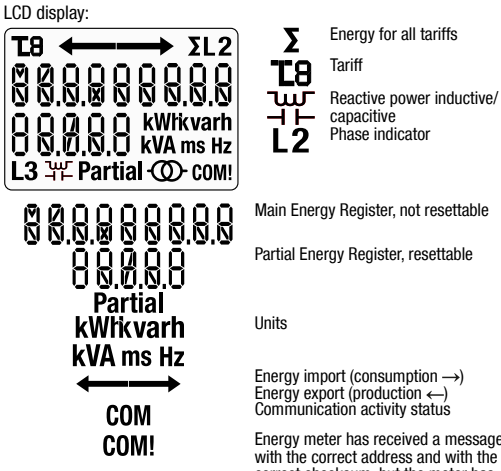

- Commands
- OK** button: is used to confirm a modification of a parameter (or of a digit of a numerical parameter) or to answer to a question
  - SCROLL** button: is used to scroll Menu pages or to modify the whole value or a digit of a parameter
  - ESCAPE** button: is used to escape to main menu from anywhere or to skip back to the previous digit of the value under modification
- Note:  
If no button is pushed for at least 20 seconds the display goes back to the Main Page and the backlight is switched off again.


### MID certified

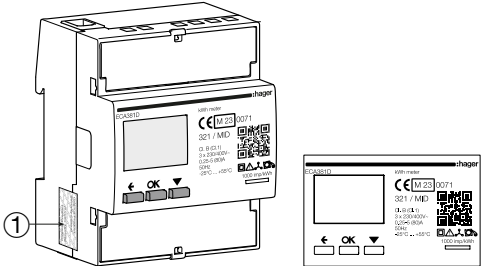

① MID safety sealing

- Symbols**
- Three phases
  - Protected by double insulation (Class II)
  - Backstop: Reversal preventing device


## Dimensions

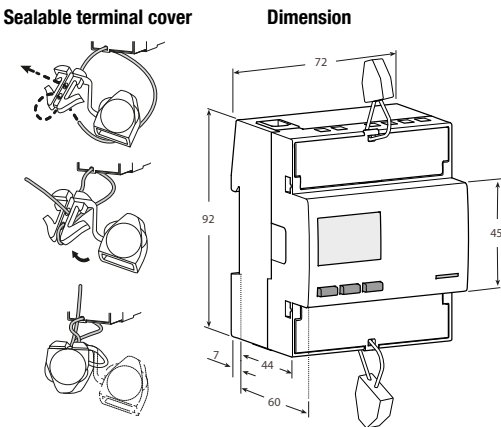

## Wiring

### Modbus RTU Communication

- Recommendations**  
Use HTGxxxH reference cables specially developed as accessories by Hager.
- Important**  
It is essential to connect a resistance (reference HTG467H) of 120 Ohms at the 2 ends of the connection.
- agardio system:**  
The plug-in and services for ECA380D are directly integrated in agardio manager HTG41XH.
- Intended use**  
The Energy Meter is suitable for use on both impedance grounded networks and not grounded networks.

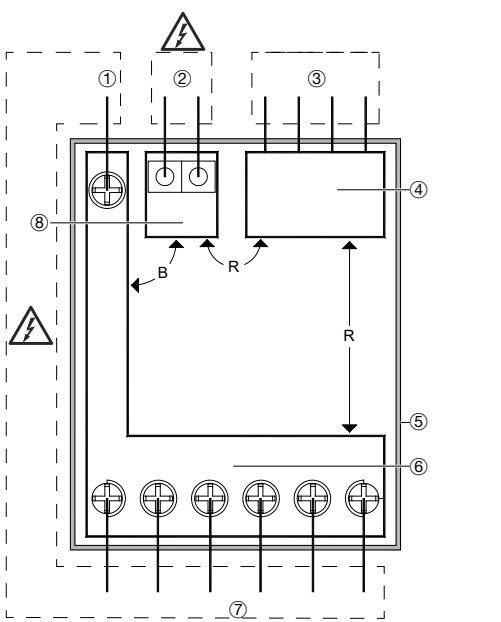


**There are no accessible parts**

Legend:  
B = Basic Insulation  
D = Double Insulation  
R = Reinforced Insulation  
F = Functional Insulation

- ① **HLV TERMINAL**, 1 terminal for neutral
- ② **HLV TERMINAL**, 2 terminal for tariff Input
- ③ **SELV TERMINALS**, 4 terminals or 2 RJ45 connectors
- ④ **SELV CIRCUIT**, (communication) working voltage <25 Vac, < 60 Vdc
- ⑤ **PLASTIC CASE** (NOT EARTHED)
- ⑥ **HLV CIRCUIT**, (mains) Working Voltage = 300 Vac
- ⑦ **HLV TERMINAL**, 6 terminal for mains
- ⑧ **HLV CIRCUIT**, (tariff input) working voltage = 300 Vac

### Wiring diagram

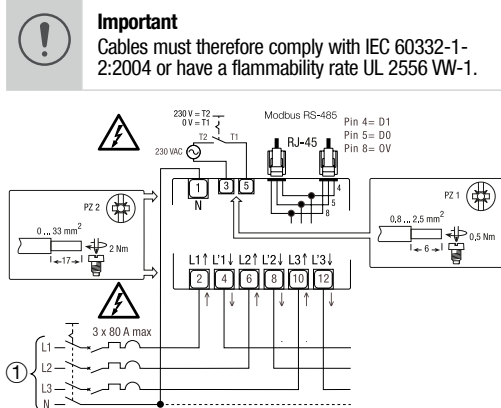

## In-unstallation

The four-pole disconnector (reference ① in the wiring diagrams) must be easy to identify and to operate and must be close to the Meter. They both must be in "OFF" position (open circuits) from the beginning to the end of the installation or of the uninstallation. The Energy Meter, the disconnectors and the overload current protection devices must be easily identifiable. They must be installed in an adequate cabinet (IP51 and V1) and it must be easy to intervene on them if necessary. Inside the cabinet, do not install any other device with a flammability class worse than V1.

## Commissioning

- Recommendations**  
Check the following before putting it into service:
  - Make sure that no dangerous voltages are connected to the SELV terminals.
  - Make sure that a phase has not been connected to the Neutral terminal (this would cause the internal protections to intervene and will damage the Meter).
  - Check that the main page appears on the display (see menu description) and not the Phase Sequence Error page.


## Maintenance

- Make sure that no voltage is applied to the instrument.
  - Only dry cleaning is allowed with a natural fiber cloth (for example cotton or linen) or synthetic fabric that does not leave residual fibers that can remain on the surface of the Energy Meter or that can penetrate into the Energy Meter.
- For this Energy meter, no maintenance, repair or replacement of parts is foreseen. Such interventions are to be considered prohibited. In case of malfunction, it must be replaced.


## Help in case of problems

### Error condition

When partial energy blinks, reset partial energy (maximum partial energy register). When the display shows the message **ERROR NO2** or **ERROR NO3**, the meter has got a malfunction and must be replaced.

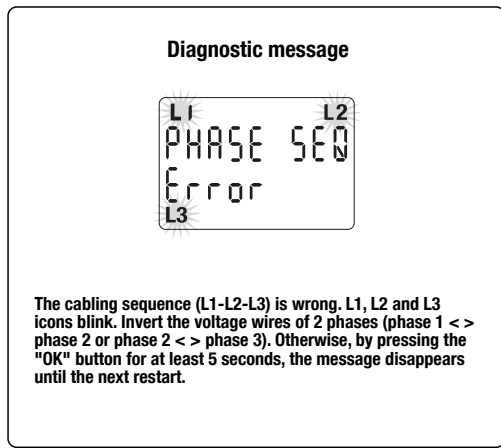

The cabling sequence (L1-L2-L3) is wrong. L1, L2 and L3 icons blink. Invert the voltage wires of 2 phases (phase 1 <> phase 2 or phase 2 <> phase 3). Otherwise, by pressing the "OK" button for at least 5 seconds, the message disappears until the next restart.

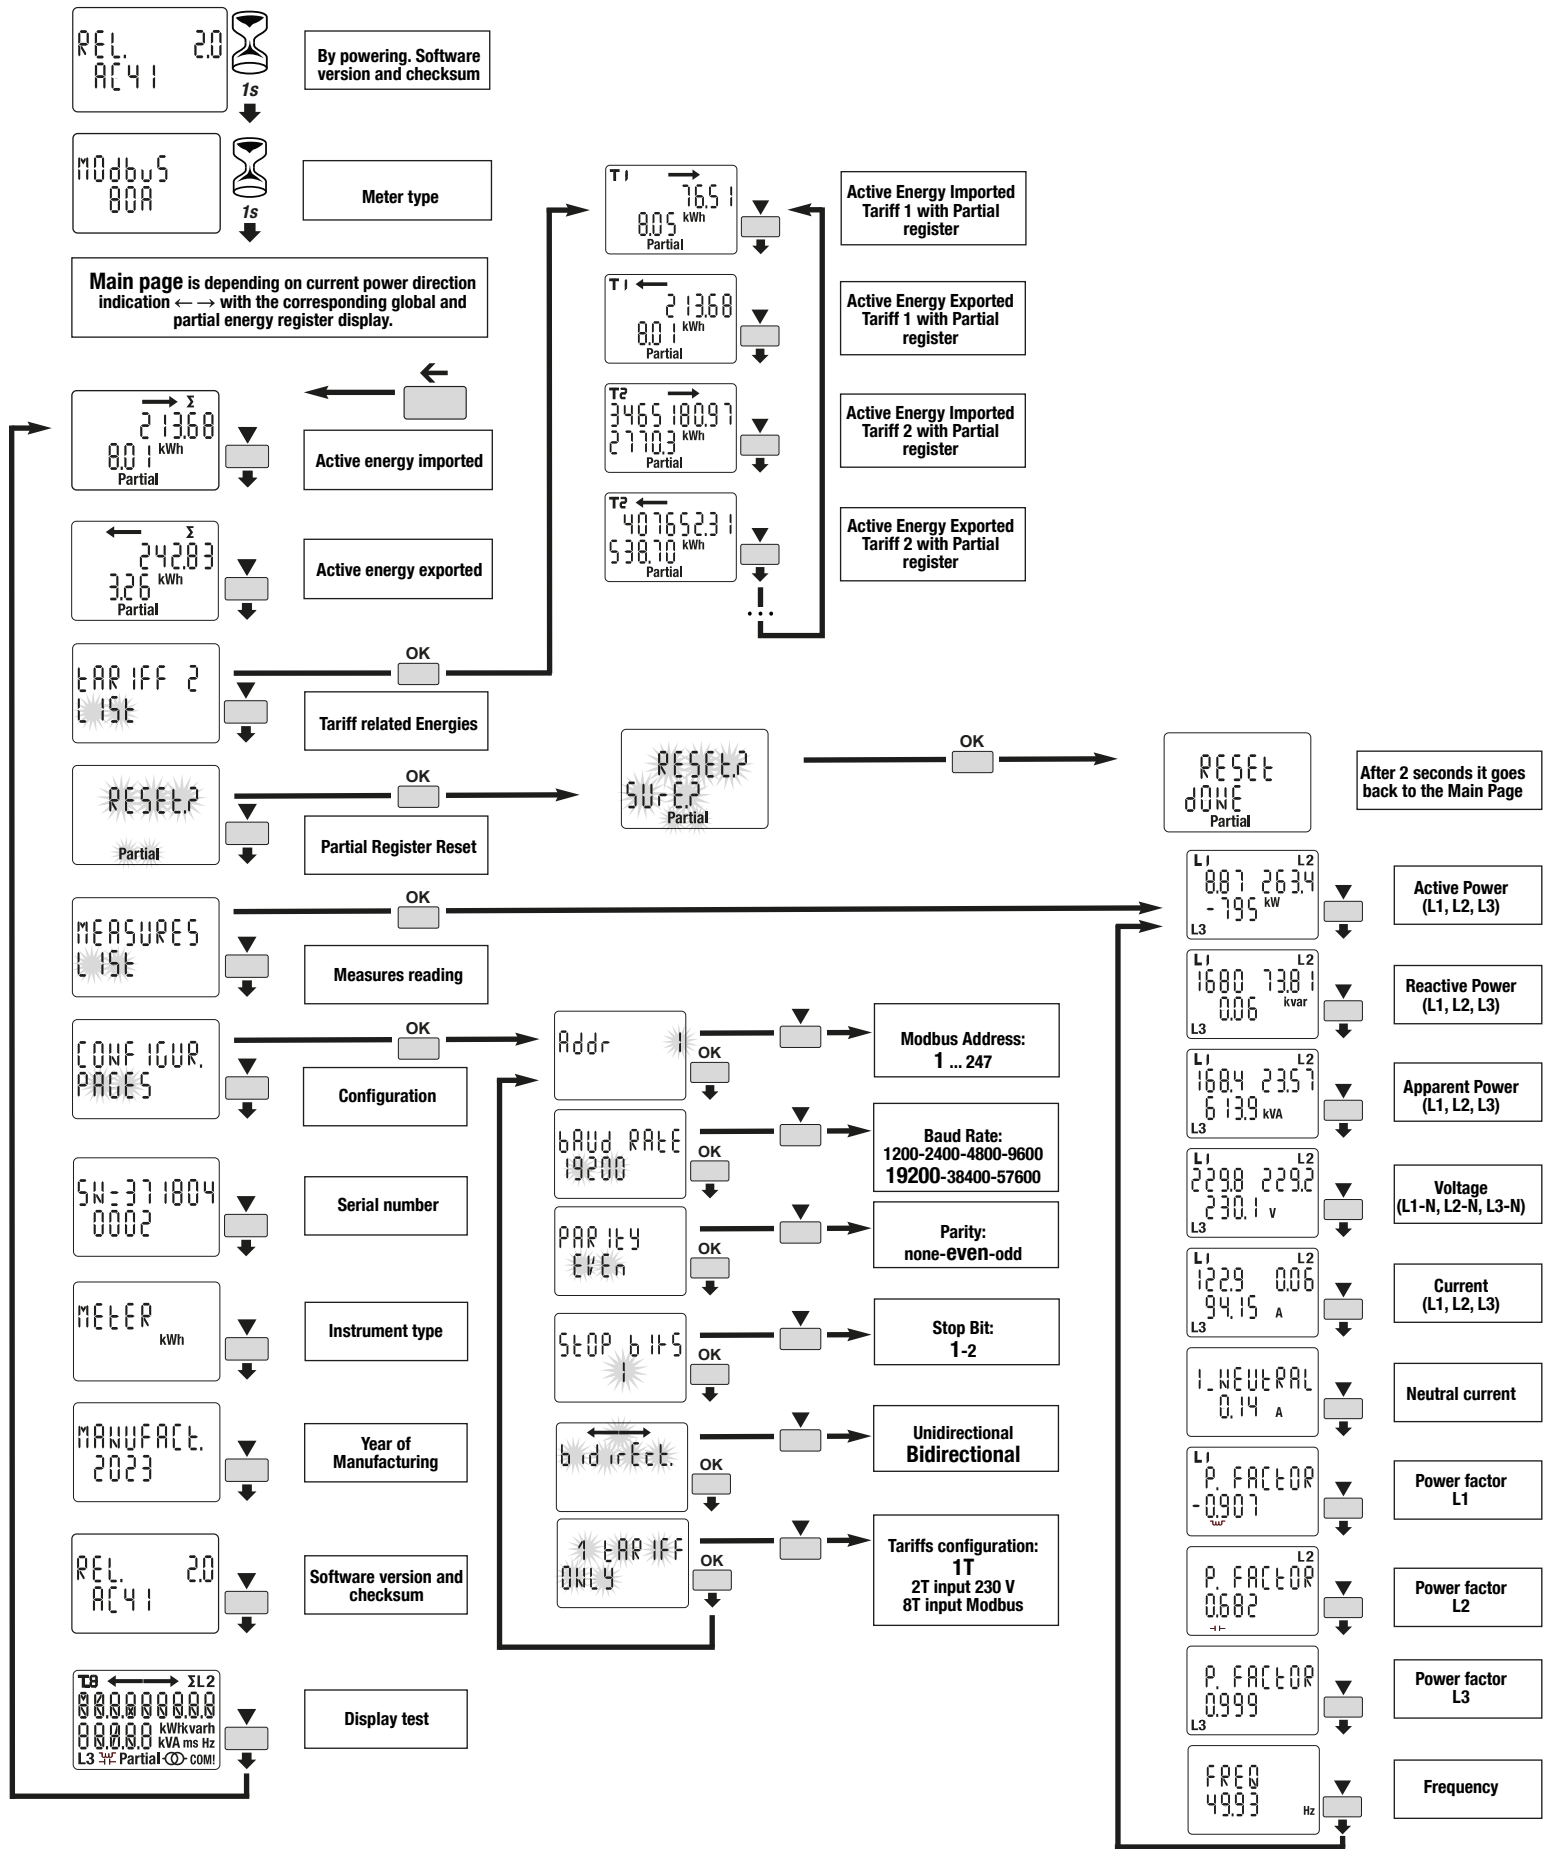

## Technical data

| Data in compliance with EN 62052-11:2021+A11:2022, EN 62052-31:2016-06, IEC 62052-31, EN 62059-32-1:2012 |                                                             |                 |                                    |                                   |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-----------------|------------------------------------|-----------------------------------|
| General characteristics                                                                                  |                                                             |                 |                                    |                                   |
| Housing                                                                                                  | DIN 43880                                                   | DIN             | 4                                  |                                   |
| Mounting                                                                                                 | EN 60715                                                    | DIN rail        | 35 mm                              |                                   |
| Depth                                                                                                    |                                                             | mm              | 60                                 |                                   |
| Weight                                                                                                   |                                                             | g               | 424                                |                                   |
| Operating features                                                                                       |                                                             |                 |                                    |                                   |
| Connection                                                                                               | to single-phase network - number of wires                   |                 | -                                  | 4                                 |
| Storage of energy values and configuration                                                               | Internal flash non volatile memory                          |                 | -                                  | ☑                                 |
| Tariff                                                                                                   | for active and reactive energy(*)                           |                 | -                                  | T1 ... T2 230V - T1 ... T8 Modbus |
| Approval (EN 62052-31:2016-06 EN 50470-3:2022)                                                           |                                                             |                 |                                    |                                   |
| Reference Voltage (Un)                                                                                   | phase / neutral                                             | VAC             | 230                                |                                   |
|                                                                                                          | phase / phase                                               | VAC             | 400                                |                                   |
| Reference Current (In)                                                                                   |                                                             | A               | 5                                  |                                   |
| Minimum Current (Imin)                                                                                   |                                                             | A               | 0.25                               |                                   |
| Maximum Current (Imax)                                                                                   |                                                             | A               | 80                                 |                                   |
| Starting Current (Ist)                                                                                   |                                                             | A               | 0.015                              |                                   |
| Transitional Current (Itr)                                                                               |                                                             | A               | 0.05                               |                                   |
| Reference Frequency (fn)                                                                                 |                                                             | Hz              | 50                                 |                                   |
| Number of phases / number of wires                                                                       |                                                             | -               | 3 / 4                              |                                   |
| Certified Measures                                                                                       |                                                             | kWh             | → kWh ← kWh                        |                                   |
| Accuracy                                                                                                 |                                                             |                 |                                    |                                   |
| - Active Energies (accord. to EN 50470-3:2022)                                                           |                                                             |                 | classe                             | B / 1                             |
| - Active Powers (accord. to IEC 62053-21:2020 and IEC 61557-12:2018)                                     |                                                             |                 |                                    |                                   |
| - Reactive Energies (accord. to IEC 62053-23:2020)                                                       |                                                             |                 | classe                             | 2                                 |
| - Reactive Power (accord. to IEC 62053-21:2020)                                                          |                                                             |                 |                                    |                                   |
| Supply Voltage and Power Consumption                                                                     |                                                             |                 |                                    |                                   |
| Operating Supply Voltage range                                                                           |                                                             | V               | 92 ... 276 / 160 ... 480           |                                   |
| Maximum Power Consumption (Voltage circuit)                                                              |                                                             | VA / W          | ≤2 / 0.6                           |                                   |
| Maximum VA burden (Current circuit) @ Imax                                                               |                                                             | VA              | ≤0.7                               |                                   |
| Voltage Input Waveform                                                                                   |                                                             | -               | AC                                 |                                   |
| Voltage impedance                                                                                        |                                                             | MΩ              | 1                                  |                                   |
| Current impedance                                                                                        |                                                             | mΩ              | ≤20                                |                                   |
| Overload capability                                                                                      |                                                             |                 |                                    |                                   |
| Voltage                                                                                                  | continuous                                                  | phase / neutral | VAC                                | 276                               |
|                                                                                                          | temporary (1 s)                                             | phase / neutral | VAC                                | 300                               |
|                                                                                                          | continuous                                                  | phase / phase   | VAC                                | 480                               |
|                                                                                                          | temporary (1 s)                                             | phase / phase   | VAC                                | 800                               |
| Current                                                                                                  | Maximum                                                     | A               | 96                                 |                                   |
|                                                                                                          | temporary (10 ms)                                           | A               | 2400                               |                                   |
| Measuring Features                                                                                       |                                                             |                 |                                    |                                   |
| Voltage range                                                                                            | phase / neutral                                             | VAC             | 92 ... 276                         |                                   |
|                                                                                                          | phase / phase                                               | VAC             | 160 ... 480                        |                                   |
| Current range                                                                                            |                                                             | A               | 0.25 ... 80                        |                                   |
| Frequency range                                                                                          |                                                             | Hz              | 45 ... 65                          |                                   |
| Measured Quantities                                                                                      |                                                             | -               | V, A, kWh, kvarh, PF, Hz, kW, kvar |                                   |
| 3 phases Energy calculation                                                                              |                                                             | -               | WELMEC                             |                                   |
| Display features                                                                                         |                                                             |                 |                                    |                                   |
| Display type                                                                                             | LCD with backlight                                          | -               | 7.2 +3.2                           |                                   |
| Active Energy                                                                                            | 7 digits + 2 decimal digits                                 | kWh             | 0.01 ... 9999999.99                |                                   |
| Voltage                                                                                                  | 3 digits + 1 decimal digit                                  | V               | 92.0 ... 276.0                     |                                   |
| Current                                                                                                  | 2 digits + 2 decimal digits / 3+1 / 4+0                     | A               | 0.00 ... 80.00                     |                                   |
| Power factor                                                                                             | 1 digit + 3 decimal digits with sign + capac./induc. indic. | -               | -1.000 ... 1.000                   |                                   |
| Frequency                                                                                                | 2 digits + 2 decimal digits                                 | Hz              | 45.00 ... 65.00                    |                                   |
| Active Power                                                                                             | 2 digits + 2 decimal digits                                 | kW              | 0.00 ... 22.08                     |                                   |
| Reactive Power                                                                                           | 2 digits + 2 decimal digits                                 | kvar            | 0.00 ... 22.08                     |                                   |
| Apparent Power                                                                                           | 2 digits + 2 decimal digits                                 | kVA             | 0.00 ... 22.08                     |                                   |
| Running Tariff                                                                                           | 1 digit                                                     | -               | T1 ... T2 230V - T1 ... T8 Modbus  |                                   |
| Display refresh period                                                                                   |                                                             | s               | 1                                  |                                   |
| Optical metrological LED                                                                                 |                                                             |                 |                                    |                                   |
| Front mounted red LED (meter constant)                                                                   | proportional to active imp/exp Energy                       | imp/kWh         | 1000                               |                                   |
| Safety                                                                                                   |                                                             |                 |                                    |                                   |
| Utilization category                                                                                     |                                                             | -               | UC2                                |                                   |
| Overvoltage category                                                                                     |                                                             | -               | 3                                  |                                   |
| Protective class                                                                                         |                                                             | classe          | II                                 |                                   |
| AC voltage test (EN 50470-3:2022)                                                                        |                                                             | kV              | 4                                  |                                   |
| Degree of pollution                                                                                      |                                                             | -               | 2                                  |                                   |
| Operational voltage                                                                                      |                                                             | V               | 300                                |                                   |
| Impulse voltage test (Uimp)                                                                              |                                                             | 1.2/50 µs-kV    | 6.4                                |                                   |
| Housing material flame resistance                                                                        | UL 94                                                       | classe          | V0                                 |                                   |
| Safety-sealing between upper and lower housing part                                                      |                                                             | -               | ☑                                  |                                   |
| Printed circuit board flammability class                                                                 |                                                             | -               | V1                                 |                                   |
| Material Group                                                                                           |                                                             | -               | IIla                               |                                   |
| IR Connectable Communication Modules                                                                     |                                                             |                 |                                    |                                   |
| For communication modules                                                                                |                                                             | -               | ☑                                  |                                   |
| Embedded Modbus communication                                                                            |                                                             |                 |                                    |                                   |
| Physical interface                                                                                       | RS-485 - 3 wires / 2 x RJ-45                                | -               | -, +, 0                            |                                   |
| Baud rate                                                                                                | adjustable                                                  | bps             | 1200 ... 57600                     |                                   |
| Parity                                                                                                   | adjustable: Odd, Even, None                                 | -               | ☑                                  |                                   |
| Stop Bit                                                                                                 | adjustable                                                  | -               | 1, 2                               |                                   |
| Address                                                                                                  | adjustable                                                  | -               | 1 ... 247                          |                                   |
| Isolation class                                                                                          | SELV                                                        | -               | ☑                                  |                                   |
| Tariff                                                                                                   |                                                             |                 |                                    |                                   |
| Tariff 1                                                                                                 |                                                             | -               | ☑                                  |                                   |
| Tariff 2                                                                                                 |                                                             | VAC             | 230 ±20%                           |                                   |
| Input impedance                                                                                          |                                                             | kΩ              | 224                                |                                   |
| Environmental conditions                                                                                 |                                                             |                 |                                    |                                   |
| Storage temperature range                                                                                |                                                             | °C              | -25 ... +70                        |                                   |
| Operating temperature range                                                                              |                                                             | °C              | -25 ... +55                        |                                   |
| Mechanical environment                                                                                   |                                                             | -               | M1                                 |                                   |
| Electromagnetic environment                                                                              |                                                             | -               | E2                                 |                                   |
| Installation                                                                                             | indoor only                                                 | -               | ☑                                  |                                   |
| Altitude (max.)                                                                                          |                                                             | m               | ≤2000                              |                                   |
| Humidity                                                                                                 | yearly average, without condensation                        | -               | ≤75%                               |                                   |
|                                                                                                          | on 30 days per year, without condensation                   | -               | ≤95%                               |                                   |
| IP rating                                                                                                | in built-in condition (front part)                          | -               | IP51(**)                           |                                   |
|                                                                                                          | terminal block                                              | -               | IP20                               |                                   |
| Emission class compatibility CISPR 32                                                                    |                                                             | classe          | B                                  |                                   |
| Durability Certification                                                                                 | according to EN 62059-32-1                                  |                 |                                    |                                   |
| (*) Tariff management is available for active and reactive energy via communication.                     |                                                             |                 |                                    |                                   |