


Residual current operated circuit-breaker RCBO with switched neutral 6 to 32A




This device is to be installed only by a professional electrician fitter according to local applicable installation standards.
Do not plug in or unplug this product when it is live.

Electrical connection

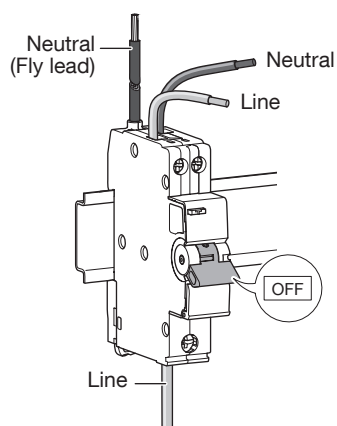

This device can be supplied either from the top or bottom without any alteration of its functions (bi-directional device).


230/240V~50Hz




	BOTTOM	TOP
(mm ²)	1 to 16 2 x 10	1 to 16 2 x 6
	12 mm	10 mm
	PZ2	PZ2
	2,1 Nm	1,9 Nm

Easy dismantling with the plastic DIN rail clip


01

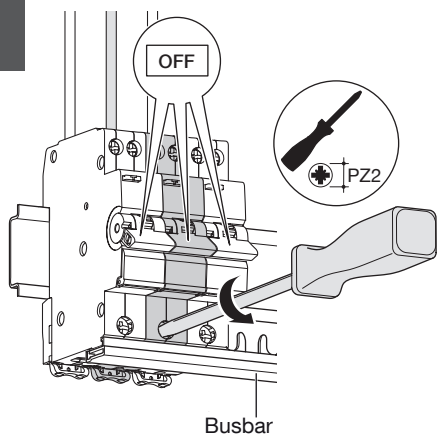

02

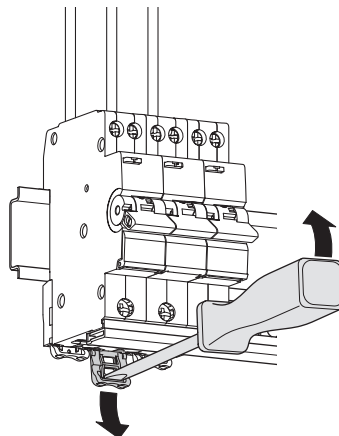


03

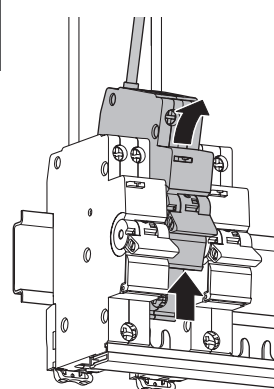


Locking device for handle MZN175




RCBO 1 module suitable for DIN rail mount & Invicta panel board (excluding UK market)

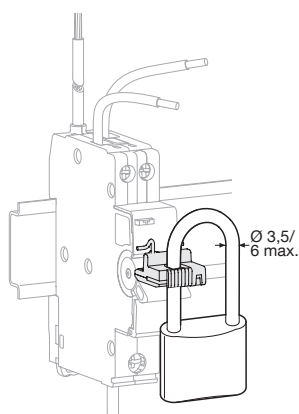


Ø 3,5/
6 max.

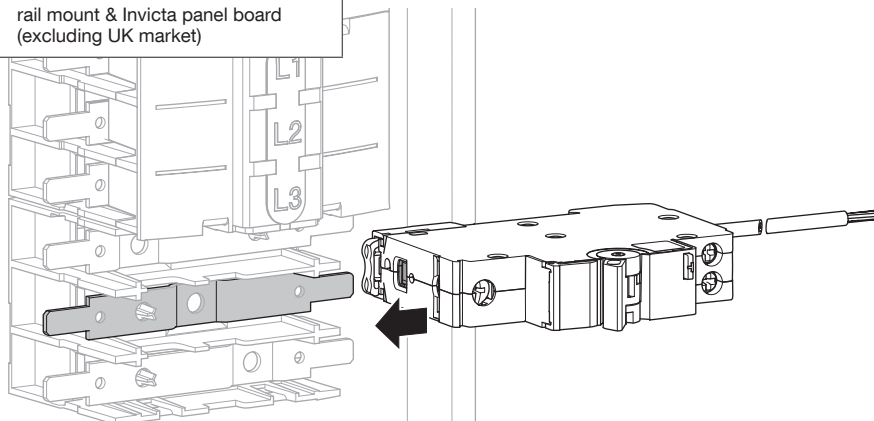

TEST

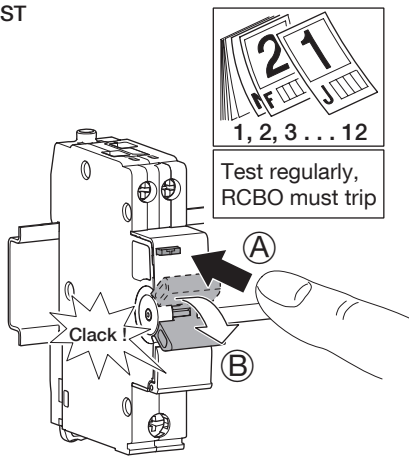

IR TEST

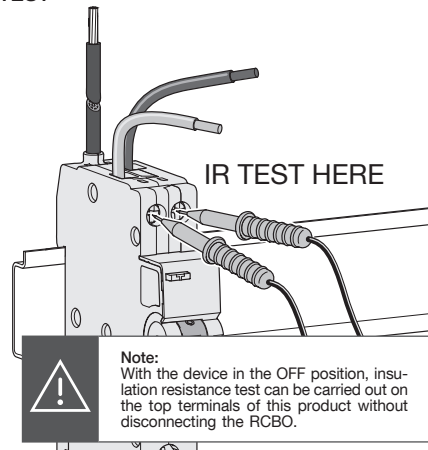

Information

EVCS Guidance notes

RCBO 32A references are used to supply a 7 kW car charger **10mm²** cable must be used from the RCBO to the installed vehicle charge point.

Can only be used in a 6 way or larger enclosure for this application.

Guidance Notes for All 100A Dual RCCB Flush Consumer Units

RCBO 32A references are not verified in any Flush 100A Dual RCCB consumer units for the continuous loading of a 7 kW car charger and **MUST** not be used.