

Radio shutter push-button quicklink

Safety instructions

Electrical equipment must only be installed and assembled by a qualified electrician in accordance with the relevant installation standards, regulations, directives and safety and accident prevention directives of the country.

Failure to comply with these instructions may result in damage to the device, fire, or other hazards.

The radio transmission is not suitable for safety or alarm applications.

These instructions are an integral component of the product, and must be retained by the end user.

Design of the device

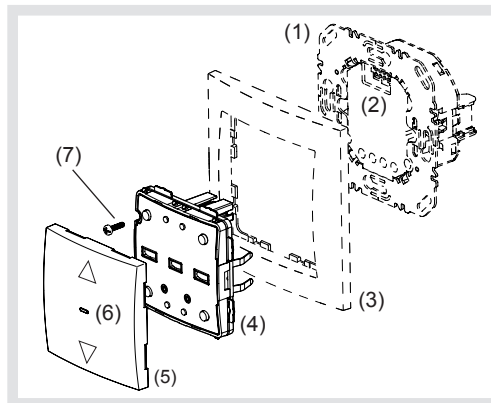


Figure 1: Design of the device

- (1) Insert (see Accessories, not in scope of delivery)
- (2) Plug interface
- (3) Frame (not in scope of delivery)
- (4) Application module
- (5) Push-button design cover
- (6) Status LED
- (7) Screw for dismantling protection (not for design lines R.1/R.3)

Function

System information

This device is a product of the quicklink system, in which installation devices communicate via radio signals.

quicklink stands for a configuration mode in which the function-related connection between transmitters and receivers is set on the device via push-buttons and displays without further tools.

All devices configurable via quicklink can be operated together in one system.

This device is compliant to the R&TTE-Directive 1999/5/EG. The Declaration of Conformity and further system information can be found on our homepage www.berker.de.

The device may be used in all EU and EFTA countries.

Correct use

- Application module for blind inserts or power supply for radio application module
- Manual and automatic operation of blind/shutter motors connected to insert
- Transmission and reception of manual, time-controlled and automatic operation commands via quicklink
- Unsuitable for lighting control

- Only suitable for use in indoor areas, no drip or spray water

i The quicklink configuration of the devices must only be carried out by qualified electricians.

Product characteristics

- quicklink functions for integration into the remote and group control of blinds/shutters
- Integration into scenes
- Party function to prevent unintentional operation of roller shutters through automated operation commands as well as radio/extension unit commands
- Memory function for easy time control of connected shutters
- Brightness-dependent operation when using a radio sun sensor
- LED display of insert/application module compatibility

Operation

Operating concept

The operation of the top or bottom push-button operation area is validated differently for each button. Simultaneous pressing of both push-button operation areas on a blind insert controls special functions such as memory or party function.

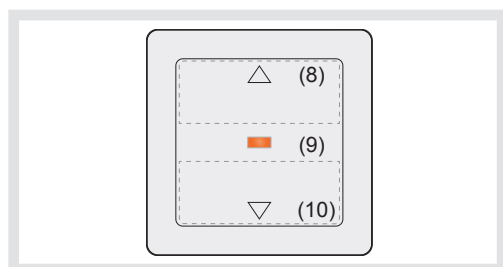


Figure 2: Operating element

- (8) Push-button operation area ▲ for UP
- (9) Status LED
- (10) Push-button operation area ▼ for DOWN

Operation on a blind insert and power supply for radio application module

- Press push-button operation area ▲ or ▼.
Short-press (shorter than 0.4 s): jog mode and adjustment of slat positions.
Long-press: lock, shutter moves to final position.
- i** Il tempo di manovra dell'autotenuta è di max. 2 minuti. Maximum run time in lock-time is 2 minutes.
- Short press on push-button operation area ▲ or ▼ during the shutter movement.
The shutter stops at the position reached.

Memory function

Operation times (if additionally required, also with stop time for blind positions) can be recorded for a 24-hour interval on blind inserts using the memory function. Saved local and extension unit operations > 0.4 s are hence executed daily and automatically (For operation, see Table 1).

i After a power failure, motion and stop commands falling into that power failure period are not executed with a time delay after voltage recovery.

i The memory function cannot be used when the party function is active.

i A maximum of 10 actions can be recorded for the 24-hour interval.

i The memory function is not available for operation on a power supply for radio application modules.

Party function

The party function prevents unintentional operation of the controlled blinds/shutters by the memory function or extension unit operation, e.g. to prevent persons from being shut out by the shutter moving down.

i When the Party function is active, a blind/shutter can only be operated manually using the buttons. Control of the shutter by higher-level control-sections and sensors as well as by extension units or radio commands is deactivated. If the blind/shutter was moved to a defined position in forced mode (see Table 4) and if this forced mode is active, then the Party function cannot be selected.

Press both push-button operation areas	Status LED display	Function and LED display
> 20 s until the Status LED turns red		Party function is activated, the Status LED turns red
> 20 s until the Status LED flashes red 3 x		Party function deactivated, the Status LED flashes red 3 x

Table 2: Operation of party function

Press both push-button operation areas	Status LED display	Function and LED display
0 ... 5 s		Running/recording of memory function is finished, the Status LED goes out and the radio blind push-button changes to normal operation.
5 ... 10 s until the Status LED flashes orange for the first time		Memory function is executed, the LED is on.
10 ... 15 s until the Status LED flashes orange for the second time		The Status LED flashes for 3 s: memory is empty and the radio blind push-button returns to normal operation.
15 ... 20 s until the Status LED flashes orange for the third time		Memory function operation times are recorded, the Status LED flashes orange for 2 s.
		Memory is full. Only 10 operation times can be recorded. The radio blind push-button changes back to normal operation.
		The Status LED flashes for 3 s: memory function is deleted and the radio shutter push-button changes to normal operation.

Table 1: Operation of memory function

Information for electricians

Overview of the operating elements beneath the design cover

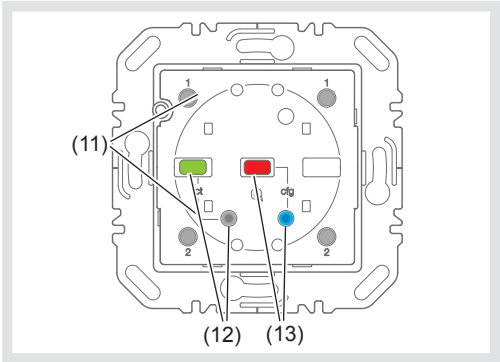


Figure 3: Operating elements for radio configuration

- (11) Press-activation points of the push-button operation areas
- (12) fct button and fct LED
- (13) cfg button and cfg LED

Mounting

Selecting mounting location

A minimum distance between the transmitter and corresponding receiver of about 1 m must be maintained.

A minimum distance to electronic devices which emit high frequency signals such as computers, electronic transformers or microwave devices of approx. 0.5 m must be maintained.

Mounting on or close to metal surfaces may cause impairment of the radio transmission.

Take material penetration into account. The range of the system can be optimised by selecting the best possible mounting location:

Material	Degree of material penetration
Wood, plaster, plasterboard, uncoated glass	approx. 90%
Brick, press boards	approx. 70 %
Reinforced concrete, floor heating	approx. 30 %
Metal, metal grids, aluminium laminates, coated glass	approx. 10 %
Rain, snow	approx. 1 ... 40 %

Table 3: degree of material penetration

Assembly of the device (Figure 1)

The insert is installed (see operating instructions for the insert).

- Attach application module (4) together with frame (3) to a suitable shutter insert (see Accessories) so that the contact pins are inserted into the available jack (2).

As soon as voltage is supplied to the radio shutter push-button, the cfg LED (Figure 3, 13) indicates whether the radio shutter push-button and the insert are compatible with each other:

cfg LED display	Meaning
cfg LED flashes green for 5 s	Compatible
cfg LED flashes red for 5 s	Not compatible
LED blinks orange for 5 s	Compatible, but not configured to each other. For a new configuration, the application module must be reset to factory settings.

- If available, fix dismantling protection with screw (7).
- After configuration, click the design cover (6) into place on the application module (2).

Radio configuration - quicklink

The radio configuration sets the functional connection between commanding (transmitters) and function-executing (receivers) radio components. Thus wireless e.g. central unit, group unit, extension unit and time controls can be realised.

The following can be configured:

- The local operation of the load connected to the insert
- Radio commands to control other receivers
- Functions that are executed when radio commands are received

i For configuration by means of Hager connection device TX100 or ETS, additional functions are available (see operating instructions for TX100 or application description for ETS).

Configuring the radio blind push-button as a receiver

Configuration to control the load connected to the insert (Table 4):

- via reception of a radio command
- via the local operation

i Local operation is a function that is pre-configured at the factory and can be changed.

As an example, the configuration of a wall transmitter and the radio shutter push-button as receiver is described below.

The design cover of the radio shutter push-button is not attached.

Configuration of radio shutter push-button as a transmitter

If the radio shutter push-button is operated as a transmitter, it can support the following functions for the receivers:

⬆️⬆️ UP/DOWN (switch)

As an example, the configuration of the radio shutter push-button with receivers for which the supported displays occur through the cfg LED and fct LED is described here. Different configuration displays, such as for receivers with display, are to be taken from the receiver operating instructions.

Deleting a configuration

To delete a configured receiver or the local operation, execute the configuration again.

- *Start configuration* (see configuration of radio button as a receiver).
- If necessary *Select transmitter button*.
- *Selezionare la funzione sul ricevitore*: sul ricevitore selezionare la funzione **Cancella e confermare la funzione sul ricevitore**. *Select function on receiver*: Select the function **Delete** on the receiver and *confirm function on the receiver*.
- *Finish configuration*: Short press on **cfg** button on the transmitter.

Configuring group functions

By means of a group function, one transmitter controls several receivers. To do so, the same function must be configured on all receivers.

- *Start configuration* (see configuration of radio button as a receiver).
- If necessary *Select transmitter button*.
- *Select function on receiver*: Select the group function as described above on each receiver to be integrated and *confirm function on the receiver*.
- *Finish configuration*: Short press on **cfg** button on the transmitter.

Configuration of scenes

Individual settings for lighting and the position of shutters can be combined into scenes. Two different scenes can be created via quicklink and called up by pressing a button on the transmitter. A scene is created by configuring a push-button operation area of a transmitter (radio command) in the corresponding receivers with the scene function (see Table 5: Configure the function for the radio blind button).

- *Start configuration*
- *Select transmitter button*: Select the button for the scene command.
- *Select function on receiver*: Select the scene function as described above on each receiver to be integrated and *confirm function on the receiver*.
- *Finish configuration*: Short press on **cfg** button on the transmitter.

Changing/saving scenes

Switching, dimming and blind statuses of the receivers in a scene can be changed and saved.

- The load status can be configured locally or by remote control on the receivers integrated into the scene, e.g. light 1 = 60 % brightness level, light 2 = 40 % brightness level, blind down.

fct LED display	Configurable function	Function resulting from transmitter operation, notes
	▲ Move UP, stop	Short press on button: adjustment of the slat position / stop Long press on button: lock, shutter moves to top final position.
	▼ DOWN, stop	Short press on button: adjustment of the slat position / stop Long press on button: lock, shutter moves to bottom final position.
	1 Scene 1	Receiver is allocated to a scene due to the configuration of the function.
	2 Scene 2	Short press on push-button: calling up the saved state of the connected load for the scene
	Shutter switch	Radio shutter switch is assigned to a compatible transmitter. Up/down function is assigned to one configuration operation.
	UP forced mode	Moves the shutter to the appropriate final position with higher-level priority. The execution of other commands is only possible when forced operation is reset.
	DOWN forced mode	
	Funzione Memory Memory function	Activates/deactivates execution of the memory function (see Memory function). Recording cannot be activated by radio command.
	Cancella.	No function Assignment to transmitter is deleted

Table 4: Configurable receiver functions

- Keep transmitter button belonging to the configured scene command pressed for more than 5 seconds.

A brief status changeover of the receiver signals the successful saving of the scene.

Setting the shutter position for scenes

If the radio shutter button is assigned to a scene as a receiver, then the shutter position can be set for this scene.

- Move the shutter to the top final position and wait for two minutes.
- Move the shutter downwards to the desired position.
- Set the desired slat position by pressing the button briefly several times (max. 30 UP steps).
- Keep transmitter button belonging to the configured scene command pressed for more than 5 seconds.

The shutter moves up for a second and then down for a second. The scene position has been saved.

Locking/unlocking scene changes

To prevent unwanted changes to a scene, the changing of the scene can be locked.

- **Start configuration.**
 - **Select transmitter button:** Select the button for the scene command.
 - **Select function on receiver:** When the function **Scene 1** or **Scene 2** is indicated by the **fct** LED blinking in green colour, keep the **fct** button on the receiver pressed for more than 5 seconds until the **cfg** LED blinks briefly.
- Then the **fct** LED indicates the currently configured status:
- 1 x blinking: Possible to change and save scene.
 - 2 x blinking: Changing the scene is locked.

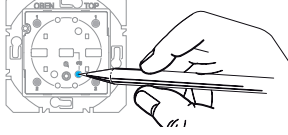
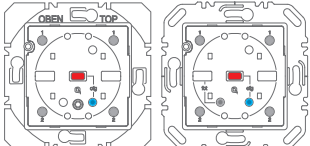


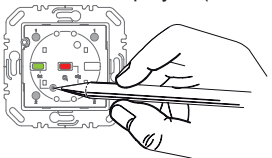
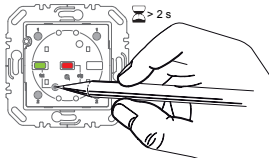

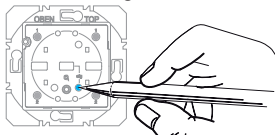
Step	Result
Start configuration	
<ul style="list-style-type: none"> ● Short press on cfg button on the wall transmitter.  <p>I If there is no further activation, the configuration is automatically ended after 10 minutes.</p>	<p>The cfg LEDs on the wall transmitter and the radio button light up in red colour.</p>  <p>All receivers within radio range also indicate the configuration mode.</p>
Select transmitter button	
<ul style="list-style-type: none"> ● Short press on press-activation point on the wall transmitter which should activate the Up function. 	<p>The cfg LED on the wall transmitter blinks for 1 second.</p>  <p>If it has already been configured, the fct LED of the radio blind button indicates the currently configured function.</p>
Select function on receiver	
<ul style="list-style-type: none"> ● Repeated short press on fct button on the radio blind button until the desired UP-function is displayed (Table 4). 	<p>After each activation, the fct LED indicates the function.</p> <p>I If the transmitter button has already been configured with a function in a different receiver and/or the configured function is part of a group control, only this function can be configured. To change a function, the existing configuration must be deleted and the new one needs to be configured.</p>
Confirming function on receiver	
<ul style="list-style-type: none"> ● To confirm, keep the fct button pressed for more than 2 seconds. 	<p>The cfg LED blinks during the saving process (approx. 5 s). The fct LED confirms the function selection by displaying the corresponding colour.</p>  <p>I Rapid blinking of the cfg LED indicates an impossible combination or an error.</p>
Finish configuration	
<ul style="list-style-type: none"> ● Short press on cfg button on the wall transmitter again. 	<p>The cfg LEDs on the wall transmitter, the radio blind button and all receivers within radio range go out. The function is configured.</p> <p>I If required, configure the Down function in the same way.</p>

Table 5: Configuration of the function for the radio shutter push-button

- Press **fct** button and select the desired setting.
The setting changes each time the button is pressed.
- To accept the selected setting time, keep the **fct** button pressed for more than 2 seconds.
- *Finish configuration:* Short press on **cfg** button on the transmitter.

Resetting to factory settings

By factory default, the button is preconfigured for the operation of a shutter insert (see Operation).

- Press the **cfg** button for more than 10 seconds.
The **cfg** LED blinks red. If the system is reset to the factory setting, the LED goes out again.

- I** This process deletes the complete configuration of the device.
- I** Reconfiguration can only commence 15 seconds after the device is reset or switched on.

Appendix

Technical data

Radio frequency	868 MHz
Radio protocol	KNX radio
Connection	Mounting on suitable inserts (see Accessories)
Power supply	via insert
quicklink logic functions	max. 20 transmitters/receivers
Receiver category	2
Transmitter duty cycle	< 1%
Change-over time	min. 600 ms
Blind operating time	2 min
Jog mode/slat adjustment time	150 ms
Relative humidity	0 ... 65 % (no condensation)
Ambient temperature	-5 ... +45 °C
Storage/transport temperature	-25 ... +70 °C

Accessories

Shutter insert Comfort	WUJ42
Power supply for radio application module	WUC18
Radio brightness sensor	TRC321A




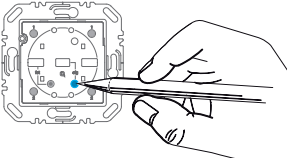
Step	Result
Start configuration <ul style="list-style-type: none"> ● Short press on cfg button on the radio shutter button.  <div>I If there is no operation, configuration is automatically ended after 10 minutes.</div>	<p>The cfg LEDs on the radio shutter button and the receivers within radio range light up in red colour. On the fct LED of the radio shutter button, the current local operation is also shown (factory setting Up/Down switch, fct LED red/green).</p> 
Select function on receiver <ul style="list-style-type: none"> ● Short press on fct button on the receiver to select the UP/DOWN (switch) function (see the receiver operating instructions). 	<p>After each operation, the fct LED indicates a function.</p> <div>I Configuration of blind operation is carried out simultaneously for both the UP and DOWN pushbutton operation areas.</div>
Confirming function on receiver <ul style="list-style-type: none"> ● To save the allocation of command and function, keep the fct button on the receiver pressed for more than 2 seconds. 	<p>The cfg LED blinks. After successful saving, the fct LED signals the saved function.</p> <div>I Rapid blinking of the cfg LED indicates an impossible combination or an error.</div>
Chiusura configurazione <ul style="list-style-type: none"> ● Short press on cfg button on the radio shutter button. 	<p>The cfg LEDs on the radio shutter button and all receivers within radio range go out. The radio command for the radio shutter button has been configured.</p>

Table 6: Configuring the radio blind button as a transmitter

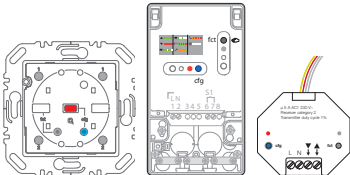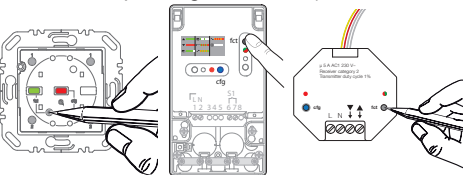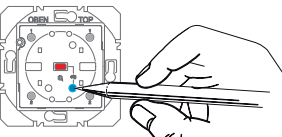