


HYW007H 3P - HYW008H 4P
HYW001H 3P - HYW002H 4P


01 HYW007H 3P
HYW008H 4P

01



	min.	max.
	400 A - 630 A	
	35	300

i

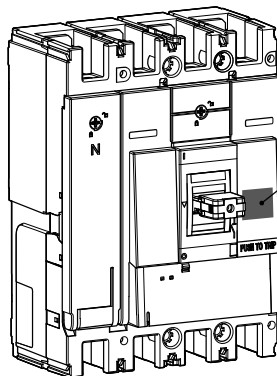


Tighten @ 25Nm,
Powered date
//____
1 month later ☐
4 months later ☐




If the collars are connected with the aluminium wires, please mark the date of power supply on the sticker and stick the sticker on the MCCB.

02

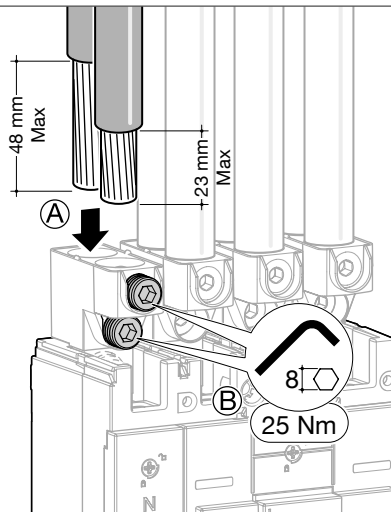


The maintenance is necessary only for the aluminium wire connection:
Tighten the screw 1 month after installation and then 3 months later tighten again.

01 HYW001H 3P
HYW002H 4P

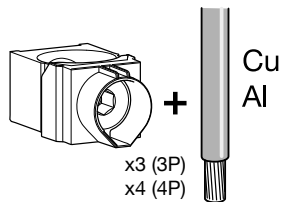


	min.	max.
	400 A - 630 A	
	35 □	300 □

02

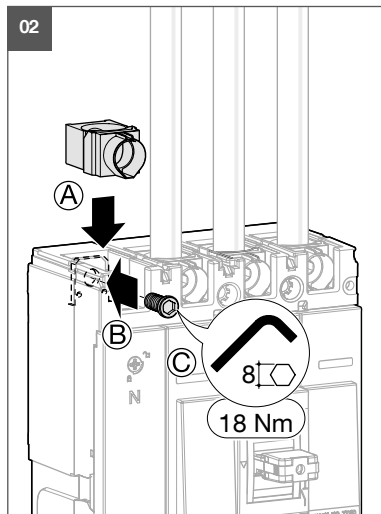

03

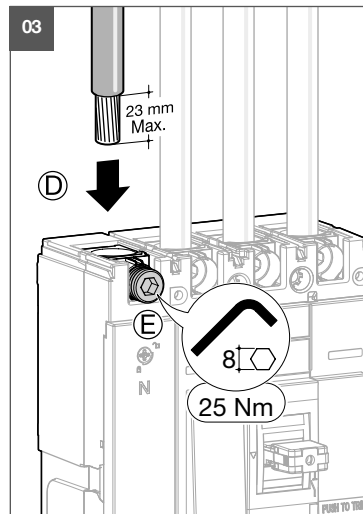

The maintenance is necessary only for the aluminium wire connection:
Tighten the screw 1 month after installation and then 3 months later tighten again.