

Consumer Unit Design Evo High Integrity 100 (InA)

For the distribution of power in a residential application, conforming to BS EN 61439-3 including Annex ZB (16kA rating).



VME915CUSPD

The Design Evo range of consumer units with a 100A rated current (InA) have been designed for any residential applications where the upstream overcurrent protective device such as a cut-out fuse is less than or equal to 100A.

Design Evo is the board for use in applications where the consumer unit is located in a living area of the dwelling and allows compliance with BS 7671:2022;

Regulation 421.1.201 within domestic (household) applications consumer units and similar assemblies shall comply with BS EN 61439-3 and shall have their enclosure manufactured from a non-combustible material.

Regulation 411.3.3 additional protection by means of a 30mA RCD

Regulation 314.1&2 segregation of circuits to avoid danger and minimise any inconvenience in the event of a fault.

Regulation 531.3.2 Unwanted tripping (ii) in order to avoid unwanted tripping by protective conductor currents and/or

earth leakage currents, the accumulation of such currents downstream of the RCD shall not be more than 30% of the rated residual operating current. High integrity boards allow circuits with high earth leakage currents to be individually protected by RCBOs, whilst the rest of the circuits are separated across the two RCCBs.

Regulation 522.6.202 protection of wiring concealed in walls or partitions with RCD 30mA.

Regulation 531.3.3 Selection of appropriate RCD. Type A RCCBs can detect and respond to both AC and pulsating DC components.

Regulation 536.4.3.2 & 536.4.202 overload protection of switches and RCCBs. For installations where the upstream overload protection is less than or equal to 100A.

Regulation 443.4 Protection against transient over voltages, provided by factory fitted type 2 SPD.

Description	Size	Cat ref.
9 Way HI Cf 100A Sw 2*100A 30mA Type A RCCB with SPD	5	VME909CUSPD
11 Way HI Cf 100A Sw 2*100A 30mA Type A RCCB with SPD	6	VME911CUSPD
15 Way HI Cf 100A Sw 2*100A 30mA Type A RCCB with SPD	7	VME915CUSPD

Features & Benefits

- 100A RCCBs allow the board to be installed with upstream overload protection offered by any rating of cut out fuse (60, 80, 100A) without the need to calculate the sum of the downstream devices to establish overload requirements.
- Type A RCCBs for general purpose circuits and circuits containing equipment incorporating electronic components.
- Cable clamp – Secures supply cables on entry to main incoming device preventing any movement being transmitted through meter tails to device.
- High integrity layout allows RCBOs (7 ways) to be fitted separate to the RCCBs for reduction of nuisance tripping on essential circuits and dividing earth leakage across multiple RCDs.
- Round cable entry points top, bottom and sides
- Rear knockouts for ease of cable entry – Cable protector plate (VM02CE) provided
- Rigid top wall – Enhances rigidity to prevent distortion when removing knockouts.
- Front cover retained screws – Prevents loss during installation
- Locate and hold cover – allows use of both hands whilst fitting cover.
- Full metal din rail – Secure and stable attachment of devices.
- Quick release clip on MCB/RCBO – Allows fitting and removal of device with busbar in place.
- Optimised cabling space – Din rail positioned to provide maximum space at top of board.
- Top mounted terminal rail makes the wiring of the neutral and earth connections neat and simple.
- Torque settings displayed inside front cover – easily accessible to electrician during installation and maintenance.
- Factory fitted type 2 surge protection

Technical Characteristics


Standards	BS EN 61439-3
Classification	Consumer Unit
Rated & Operational Voltage (U_N/U_e)	230V a.c 50 Hz
Rated Insulation Voltage (U_i)	320V a.c. 50Hz
Rated Frequency (fn)	50 Hz
Rated impulse withstand voltage (U_{imp})	4kV
Rated Current of the Assembly (InA)	100A
Rated Current of an Outgoing Circuit I_{nC}	RCBO ADB4**G - 40A - 50A (Marked Rated Current on Device) RCBO ADB9**R - 6A - 32A (Marked Rated Current on Device)
Rated Conditional Short Circuit of the Assembly (I_{cc})	Annex ZB: 16kA rms at 250V, power factor 0.6 with equipment and arrangements specified in Hager's technical documentation/catalogue
Rated Current of the Assembly Circuit	RCCB 100A (Marked Rated Current on Device)
Protection against electric shock	Consumer Unit shall be installed in an electrical system conforming to IEC 60364 / BS 7671
Rated Diversity Factor (RDF) / Values of assumed loading	10 Way and above - 0.5
<p>Note: RDF only applies to continuously and simultaneously loaded circuits. In principle, this means adjacent circuit breakers having a load on time exceeding 30 minutes or where a load not exceeding 30 minutes has an 'off' time less than the 'on' time will need to have the rated diversity factor applied as indicated.</p>	
Pollution Degree	2
Types of System Earthing for which the assembly is designed	TNC-S and TN-S when installed in an electrical system conforming to BS 7671
Intended locations	Indoor use only
Stationary assembly	
Degree of protection	IP2XC with door open / closed and full compliment of devices / blanks fitted. Note: Where cables are installed through the top wall of the enclosure, gaps of IP4X to be maintained.
Intended use	Intended for use in domestic (residential) or similar premises
Electromagnetic compatibility (EMC) classification	EMC environment B
External design	Wall mounted, surface type, enclosed assembly.
Mechanical impact protection	IK05
Type of construction	Fixed parts
Incoming Line/Neutral terminal	50mm ²

Accessories

Cable protector plate	Provides protection for cables entering from the rear of the board	VM02CE
Rear stand off plates	To stand consumer unit off wall allowing surface mounted cables to enter through rear of unit	VM01SP

Design Dimensions (mm)

	Enclosure Size					
	5	6	7	4(2)	5(2)	7(2)
Height	240	240	240	480	480	480
Width	364	400	472	293	364	472
Depth	102.5	102.5	102.5	102.5	102.5	102.5

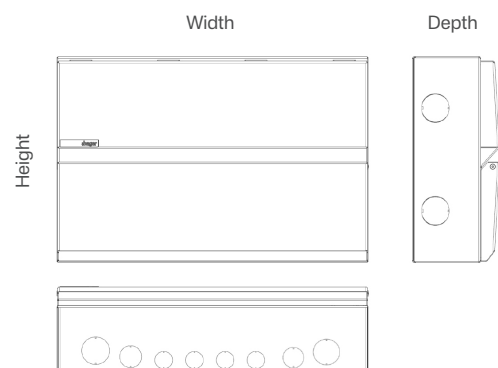

- Suitable for CT2 connection as per 534.4.3.2 BS7671 18th Edition
- Optical status indication for cartridge replacement
Green = Healthy, Red = Replace
- Replacement cartridge reference : **SPL013Z**
- Pluggable surge protection module for ease of replacement
- Cartridge can be routinely checked and changed if required without interrupting supply to loads
- No secondary back-up protection required.



SPD P+N TN-C-S/TNS/TT Uc 275V In 20kA Imax 40kA

Technical Features

Number of modules	1
Dimensions	
Depth	74 mm
Height	84 mm
Width	17.5 mm
Electric current	
Max. discharge (Imax) L-N(PEN)/ N-PE	40 kA
Max. overcurrent protection device, parallel connection (fuse)	100 A
Equipment	
With remote signalling contact	No
Frequency	
Frequency	50 - 60 Hz
Installation, mounting	
Nominal tightening torque	1.2 - 2.5 Nm
Network configuration	
Network type	TN-C-S TN-S TT
Standards	
Requirement class IEC 61643	T2
Use conditions	
Operating temperature	-40 - 60 °C
Voltage	
Continuous operating voltage Uc according to IEC 61643-1	275 V
Rated operational voltage Ue	230 - 230 V
Voltage level Up L-N/PEN IEC 61643-11	1.5 kV
Sustainability	
REACH conform	Yes
RoHS conform	Yes