Product Datasheet
BDC825



BDC825

Earth leakage add-on-block with double output 4P 25A 30mA AC class

Technical Features

Architecture

Neutral position	Left
Number of poles	4

Capacity

Number of modules	3

Voltage

Rated operational voltage Ue	230 - 400 V
Rated insulation voltage Ui	500 V
Rated impulse withstand voltage Uimp	4000 V

Frequency

Frequency	50 - 50 Hz

Electric current

Rated residual operating current Idn	30 mA
Rated current	25 A

Connectivity

Down connection alignment for modular devices	Aligned terminal

Installation, mounting

Nominal tightening torque	1.70 - 1.70 Nm

Dimensions

Height	102 mm
Width	52.50 mm
Depth	70 mm

Sustainability

RoHS conform	Yes
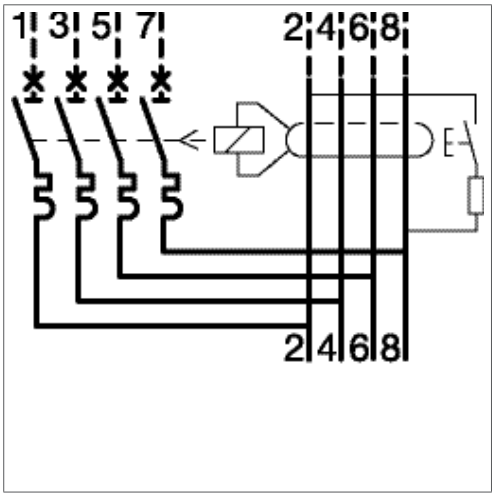
Illustrations | Drawings