



Invicta 3 JN2 MID Meter Kit - JN201MID

Instructions/Data Sheet


Sales Service Centre: 01952 675 612
Sales Service Centre Faxline: 01952 675 645

Technical Service Centre: 01952 675 689
Technical Service Centre Faxline: 01952 675 557


www.hager.co.uk

Components in this kit:


- Meter, CT and loom assembly
- 3 x M4 meter bracket fixings
- 4 x CT bracket fixings
- (2 x M4, 2 x 4mm self taper)

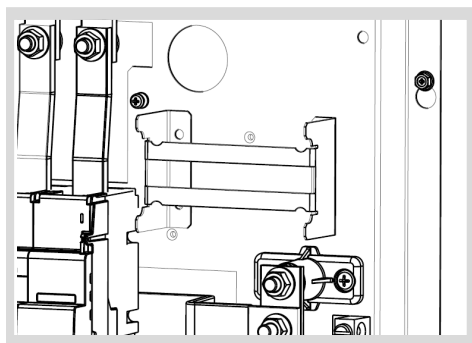


Fit 2 x meter bracket M4 fixings into the chassis, allowing clearance for the bracket slots

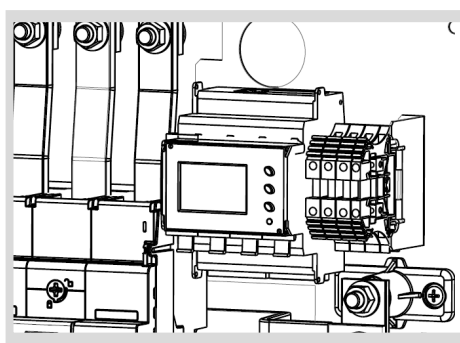

Fit the meter and fuses back in place as shown above.

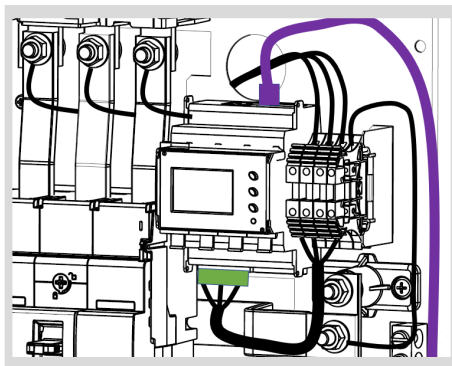

Fit meter sub-assembly to support bracket and connect the meter L1 L2 L3 ring terminals to the M8 studs and torque to 13Nm, connect the Neutral cable to the neutral assembly and re-torque to 13Nm.

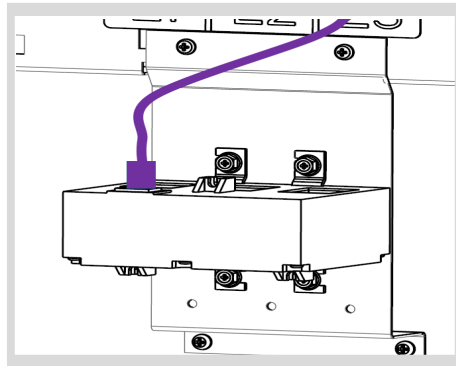

Fit lower CT pack to pan assembly using 2 x M4 m/c screws and 2x self tapping screws. Plug RJ45 lead into CT & meter.